

FLAT H3 P10 RV R4 H1200

CIA M



IT

Vetrina Refrigerata Ventilata.

Teca vetro con serraggio meccanico | fianchi laterali riscaldati | micro-plafoniera in alluminio brillante con illuminazione Led | scorrevoli in PETG easy sliding | deflettore frontale anti-condensa | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con sistema a capillare (valvola termostatica per motore esterno) | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi e pianetto perimetrale in acciaio lucido | piano di lavoro in acciaio lucido | telaio portante in acciaio zincato con piedini inox regolabili in altezza | vano tecnico e vano a giorno in acciaio inox lucido

EN

Ventilated Refrigerated Showcase.

Glass structure with mechanical fastening | heated glass sides | bright aluminum LED light fixture | PETG easy sliding doors system | anti-fog air baffle | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external motor) | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel

FR


Vitrine Réfrigérée Ventilée.

Vitrage avec fermeture | côtés vitrés chauffants | micro-plafonnier en aluminium brillant avec éclairage LED | coulissants en PETG avec ouverture simple | déflecteur avant avec système anti-condensation | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec système capillaire (vanne thermostatique pour groupe distant) | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et plan périmétral en acier poli | plan de travail en acier poli | châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur | compartiment technique et compartiment ouvert en acier inoxydable poli




+4°C / +6°C



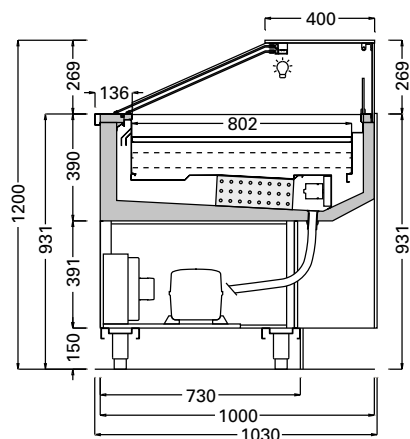

Technical



Ventilated



Automatic



R452A / R290 ECO Friendly



N. 4 / H.R. 55%
30 °C (86 °F)



Hermetic



230 V / 1 Ph / 50 Hz



Led no-spot 3000°K



+4/+6°C

Data Sheet (built-in compressor)

	Model Code	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion W / °C	GAS Type
	F103R412RV090I (+SKIN)	900x1030x1200H 	120 	620 / 3.5	0.35	545 / -10	R290
	F103R412RV100I (+SKIN)	1000x1030x1200H 	120 	620 / 3.5	0.35	545 / -10	R290
	F103R412RV130I (+SKIN)	1300x1030x1200H 	160 	800 / 4.0	0.5	790 / -10	R290
	F103R412RV150I (+SKIN)	1500x1030x1200H 	160 	800 / 4.0	0.5	790 / -10	R290
	F103R412RV170I (+SKIN)	1700x1030x1200H 	180 	890 / 4.5	0.6	880 / -10	R290
	F103R412RV200I (+SKIN)	2000x1030x1200H 	190 	1250 / 6.0	0.8	1020 / -10	R290
	F103R412RV210I (+SKIN)	2100x1030x1200H 	190 	1250 / 6.0	0.8	1020 / -10	R290
	F13R412RV AP90QI (+SKIN)	1135*1135x1030x1200H 	200 	1100 / 6.0	0.7	950 / -10	R452A
	F13TS12RV AP90FI* (+SKIN)	R1407x1030x1200H 	130 	890 / 4.5	0.6	820 / -10	R452A

Optionals:

