

SIDES

Standard
- Solid

Options
- Double glazed glass sides

INTERIORS

Standard
- Matt black (RAL7021)
epoxy powder coating

Options
- RAL epoxy powder
coating on request

DOORS

Standard
- "Zero" doors
- Triple glazed glass
- Black screen-printing

Options
- Custom RAL screen-printing
- Heated glass

EXTERIOR CLADDING

Standard
- Powder-coated
stainless steel in matt
black finish (RAL7021)

Options
- RAL epoxy powder
coating on request



IT

Murale refrigerato a temperatura positiva

Vasca monolitica coibentata con poliuretano ecologico e rivestita in acciaio inox | impianto a parete con refrigerazione a circolazione forzata d'aria su tutti i livelli espositivi | sbrinatori automatici programmati | versione con U.C. ermetica interna o esterna | centralina elettronica | fianchi ciechi | sportelli tipo 'zero' raso muro con serigrafia RAL 7021 | vassoio di fondo in acciaio | schienale in acciaio verniciato a polveri RAL 7021 | mensole in acciaio verniciato a polveri RAL 7021 regolabili su asta a cremagliera | illuminazione indiretta incorporata sul telaio porte con strip-LED no spot 3000°K | vano tecnico e basamento in acciaio inox | piedini inox regolabili in altezza

EN

Refrigerated wall cabinet at positive temperature

Molded heat-insulated tank made of ecological polyurethane and coated with s/s | system placed in the back panel with ventilated refrigeration on all display levels | automatic defrosting | version with remote or built-in hermetic condensing unit | digital control panel | s/s sides | 'zero' flush-mounted doors with RAL 7021 screen printing | bottom tray in s/s | back in powder coated steel RAL 7021 | shelves in powder coated steel RAL 7021 adjustable on rack | indirect lighting integrated on the door frame with 3000°K diffused LED | base of counter in s/s | s/s feet adjustable in height

FR


Vitrine murale réfrigérée à température positive

Cuve monolithique isolée en polyuréthane écologique et revêtue d'acier inoxydable | évaporateur dans le dossier avec réfrigération à circulation d'air forcé sur tous les niveaux d'exposition | dégivrage automatique programmé | version avec unité de condensation hermétique distante ou logée | unité de commande électronique | panneaux latéraux pleins | portes murales type 'zéro' avec sérigraphie RAL 7021 | plateau de fond en acier | dossier en acier thermolaqué RAL 7021 | étagères en acier inox thermolaqués RAL 7021 réglables sur crémaillère | éclairage indirect incorporé sur le cadre de la porte avec bandeaux LED diffusant 3000°K | compartiment technique et base en acier inoxydable | pieds en acier inoxydable réglables en hauteur



+4°C / +8°C



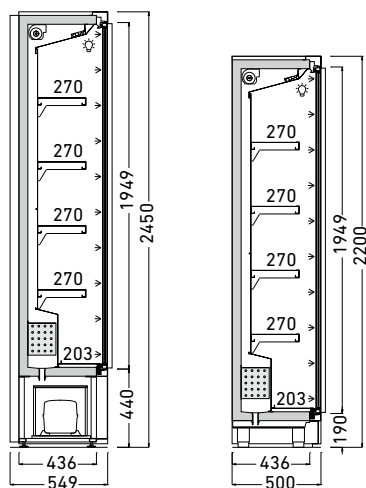

Technical



Ventilated	Automatic / electrical
R452A	N. 4 / H.R. 55% / 30°C
Hermetic	230 V / 1 Ph / 50 Hz
LED no-spot 3000°K	+4 / +8°C

Data Sheet (built-in compressor)

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion W / °C	GAS Type
	EXL51PPVT6I 	680x549x2450H 860x729x2740H	150 90	1000 / 5,9	0,6	700 / -16	R452a
	EXL51PPVT12I 	1280x549x2450H 1460x729x2740H	270 150	1350 / 7,0	0,9	1000 / -16	R452a
	EXL51PPVT18I 	1880x549x2450H 2060x729x2740H	360 205	1800 / 8,9	1,2	1300 / -16	R452a
	EXL51PPVT24I 	2480x549x2450H 2660x729x2740H	410 270	2000 / 11,0	1,4	1600 / -16	R452a

Options:

side with glass window	heated double glazing	arrangement for cabinets flush wall	back panel	s/s shelf for horizontal display	wooden shelf with steel inserts	s/s tray for slightly slant bottle display	gres/wood/acrylic 60x60mm tile	float/fumé glass shelves
s/s tubes for slant bottle display	solid oak wood shelf	SLIDE doors	PREMIUM door	electronic lock	touch panel	dimmer control for LED lighting	ciam connect	tube antibacterial sanitization system