

## SIDES

Standard  
- Solid

Options  
- Double glazed glass sides

## INTERIORS

Standard  
- Matt black (RAL7021)  
epoxy powder coating

Options  
- RAL epoxy powder  
coating on request

## DOORS

Standard  
- "Zero" doors  
- Triple glazed glass  
- Black screen-printing

Options  
- Custom RAL screen-printing  
- Heated glass

## EXTERIOR CLADDING

Standard  
- Powder-coated stainless steel  
in matt black finish (RAL7021)

Options  
- RAL epoxy powder  
coating on request

IT

## Murale refrigerato a temperatura positiva

Vasca monolitica coibentata con poliuretano ecologico e rivestita in acciaio inox | impianto a parete con refrigerazione a circolazione forzata d'aria su tutti i livelli espositivi | versione con U.C. ermetica interna o esterna | sbrinatori automatici programmati | centralina elettronica | fianchi ciechi | sportelli tipo 'zero' raso muro con serigrafia RAL 7021 | vassoio di fondo in acciaio | schienale in acciaio verniciato a polveri RAL 7021 | mensole in acciaio verniciato a polveri RAL 7021 regolabili su asta a cremagliera | illuminazione indiretta incorporata sul telaio porte con strip-LED no spot 3000°K | vano tecnico e basamento in acciaio inox | piedini inox regolabili in altezza

EN

## Refrigerated wall cabinet at positive temperature

Molded heat-insulated tank made of ecological polyurethane coated with AISI 304 s/s | system in the back panel with ventilated refrigeration on all display levels | version with remote or built-in hermetic condensing unit | automatic defrost | digital control panel | s/s sides | 'zero' flush-mounted doors with RAL 7021 screen printing | bottom tray in s/s | back in powder coated steel RAL 7021 | shelves in powder coated steel RAL 7021 adjustable on rack | indirect lighting integrated on the door frame with 3000°K diffused LED | base of counter in s/s | s/s feet adjustable in height

FR


## Vitrine murale réfrigérée à température positive

Cuve monolithique isolée en polyuréthane écologique et revêtue d'acier inoxydable | évaporateur dans le dossier avec réfrigération à circulation d'air forcé sur tous les niveaux d'exposition | version avec unité de condensation hermétique distant ou logé | dégivrage automatique programmé | unité de commande électronique | panneaux latéraux pleins | portes de type 'zéro' avec sérigraphie RAL 7021 | plateau de fond en acier | dossier en acier thermolaqué RAL 7021 | étagères en acier thermolaqué RAL 7021 réglables sur crémaillère | éclairage indirect incorporé sur le cadre de la porte avec bandeaux LED diffusant 3000°K | compartiment technique et socle en acier inoxydable | pieds en acier inoxydable réglables en hauteur



+2°C / +8°C



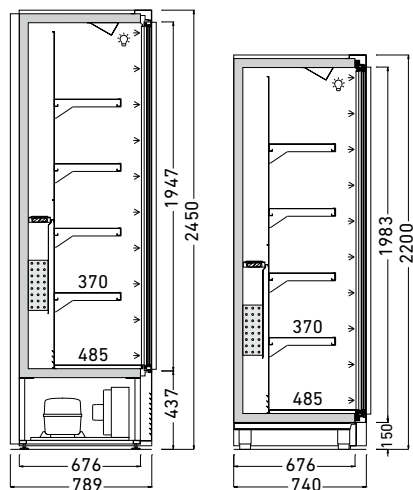

## Technical



|                    |                        |
|--------------------|------------------------|
| Ventilated         | Automatic / electrical |
| R455a/R452a        | N. 4 / H.R. 55% / 30°C |
| Hermetic           | 230 V / 1 Ph / 50 Hz   |
| LED no-spot 3000°K | +2 / +8°C              |

## Data Sheet (built-in compressor)

|  | Code (+SKIN)<br>Energy Label | Dimensions<br>mm                 | Weight<br>Kg | Max Pwr.<br>Consumption<br>W / A | Avg Operating<br>Consumption<br>KW/H | Cooling<br>Power/Expansion<br>W / °C | GAS<br>Type    |
|--|------------------------------|----------------------------------|--------------|----------------------------------|--------------------------------------|--------------------------------------|----------------|
|  | EXL74PPVT6I<br>              | 680x789x2450H<br>860x969x2740H   | 180<br>115   | 1050 / 5,9                       | 0,6                                  | 850 / -13                            | R455a<br>R452a |
|  | EXL74PPVT12I<br>             | 1280x789x2450H<br>1460x969x2720H | 300<br>195   | 1350 / 7,1                       | 0,9                                  | 1300 / -13                           | R455a<br>R452a |
|  | EXL74PPVT18I<br>             | 1880x789x2450H<br>2060x969x2720H | 400<br>275   | 1800 / 8,0                       | 1,2                                  | 1700 / -13                           | R455a<br>R452a |
|  | EXL74PPVT24I<br>             | 2480x789x2450H<br>2660x969x2720H | 500<br>355   | 2000 / 11,0                      | 1,3                                  | 2100 / -13                           | R455a<br>R452a |

## Options:

|                                    |                       |                                     |             |                                  |                                 |                                            |                                |                                                         |
|------------------------------------|-----------------------|-------------------------------------|-------------|----------------------------------|---------------------------------|--------------------------------------------|--------------------------------|---------------------------------------------------------|
| side with glass window             | heated double glazing | arrangement for cabinets flush wall | back panel  | s/s shelf for horizontal display | wooden shelf with steel inserts | s/s tray for slightly slant bottle display | gres/wood/acrylic 60x60mm tile | float/fumé glass shelves                                |
| s/s tubes for slant bottle display | solid oak wood shelf  | tube with hooks for charcuterie     | SLIDE doors | PREMIUM door                     | electronic lock                 | touch panel                                | ciam connect                   | II Tube WHIDE<br>tube antibacterial sanitization system |