

TORTUGA 2 P800 BT

CIA M

GLASS GANTRY

Standard
- Triple-glazing, black screen printing

Options
- Heated triple-glazing
- Custom screen printing
RAL color

INTERIORS

Standard
- Polished s/s

Options
- Acrylic
- Gres
- Epoxy coated s/s

EXTERIOR CLADDING

Standard
- HPL black/white/gray

Options
- HPL RAL



IT

Vetrina refrigerata ventilata Temperatura Negativa

Teca in vetri camera fissi | serigrafia "black" | profili in alluminio brillantato | nr. 2 mensole intermedie con illuminazione regolabili su sistema a cremagliera elettrificata a bassa tensione | chiusura lato operatore con ante scorrevoli in vetro camera | vetro frontale riscaldato | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata su tutti i livelli espositivi | unità condensatrice ermetica incorporata | sbrinatori automatici a inversione di ciclo | centralina elettronica e lettore digitale della temperatura | vassoi espositivi in acciaio lucido | telaio portante in tubolare verniciato con piedini inox regolabili in altezza

EN

Ventilated refrigerated showcase low temperature

Fixed double glazed glass case | "black" silkscreen printing | polished aluminium profiles | nr. 2 intermediate shelves with lighting adjustable on low-voltage electrified rack system | operator-side closing with double-glazed sliding doors | heated front glass | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration on each display level | built-in hermetic condensing unit | automatic reverse-cycle defrosting | electronic control unit and digital temperature reader | display trays in polished steel | supporting frame display trays in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet


FR

Vitrine réfrigérée ventilée température négative

Vitrage avec double verre fixe | sérigraphie "noir" | montants en aluminium brillant | 2 étagères intermédiaires avec éclairage réglables sur une crémaillère électrifiée à basse tension | fermeture côté opérateur avec portes coulissantes en double vitrage chauffé | vitrage frontal chauffé | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée sur tous les niveaux d'exposition | unité de condensation hermétique intégrée | dégivrage automatique à inversion de cycle | commande numérique et afficheur de température | plateaux d'exposition en acier poli | châssis de support en tubulaire peint avec pieds en acier inoxydable réglables en hauteur

 -18°C



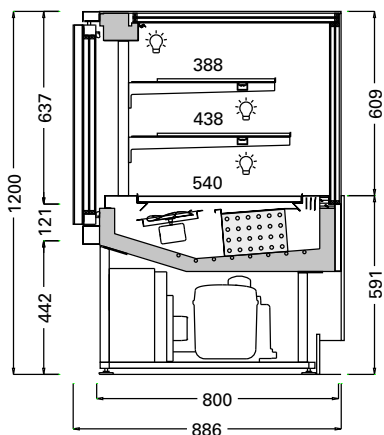

Technical



Ventilated	Automatic / reverse cycle
R452A	N. 3 / H.R. 60% / 25 °C
Hermetic / 2	230 V / 1 Ph / 50 Hz
LED no-spot 3000°K	-18°C

Data Sheet

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion W / °C	GAS Type
	TRT2P8GEL120I 	1200x886x1200H 1380x1066x1470H	270 110	2400 / 12.1	1.6	950 / -35	R452A

Options:

Screen printing RAL color	Heated glass	Stainless steel profiles	Perimetral top for drop-in config.	Condensation water pan	Kit of casters